



The new TMX 1500 forced-action mixer

for larger mixing volumes
at the construction site



Picture similar

› Materials and applications




TMX 1500 forced-action mixer

- Sturdy mixer for prebagged material with usable volumes of up to 120 litres (5 sacks)
- For all types of plastic mortar, plaster, screed and concrete (-16 mm) and high-volume dry fill materials
- The mixing tool can be removed without requiring any other tool
- Bottom segment slidegate for emptying contents into a bucket or wheelbarrow
- Easy emptying thanks to vibrating device on the outlet
- Adapter for vacuum cleaner, for dust-free work
- Safety shut-down and lid detection
- Hard rubber wheels, therefore extremely stable
- Lashing eyes
- Compact size, fits through 80-cm-wide doors
- Easy to clean, extendible outlet shaft
- Housing protects the motor block, less dirt
- Easy to clean, extendible outlet shaft with vibrating mechanics.



· Vibrating mechanics ·

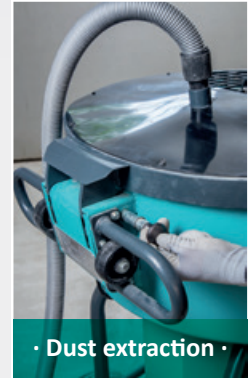

· Dust extraction ·



· Mixing tool ·

Material (weight without the addition of water)

Concrete up to 16 mm grain size	+
Cement screed	+
Synthetic resin screed (2K, 0.6/1.2 mm)	+
Cement and universal mortar	+
Lightweight masonry mortar	+
Plaster of Paris	+
Cement plaster	+
Gypsum plaster	-
Thermal insulation plaster	+
Natural stone mortar/cobblestone mortar	+
2K pavement grout (up to 1.2 mm)	+
thin/fluid screed types	-
thin/fluid mortar types	-
Tile adhesive	-
Grout	-
Levelling compounds/self-levelling fillers	-
Packing mortar	+
Steel fibre mortar	+
Lightweight aggregate	+

Technical data

Capacity:	150 litres
Usable volumes:	120 litres
Motor output:	2.8 kW
Voltage:	230 V / 50 Hz
Speed of mixing tool:	30 rpm ⁻¹
Height to bottom edge of discharge chute:	625 mm
Dimensions:	840 x 755 x 1,260 mm
Noise emissions:	86 dB
Weight:	138 kg
Item no.:	37081

Your Collomix specialised dealers:



Collomix GmbH | Daimlerstr. 9 | 85080 Gaimersheim | Germany
Tel. (08458) 32 98 0 | Fax (08458) 32 98 30 | info@collomix.de | www.collomix.com

