

Manufactured entirely in house according to ISO 9001,  
SGS and CE quality control standards

Welcome to visit our company at any time

**Introducing  
The Tank**



**HIGH TECH GRINDING**  
Self-propelled Floor Grinder



**HIGH TECH GRINDING**

Global Advocate Of Self-propelled Grinding Machines

[WWW.XY1118.COM](http://WWW.XY1118.COM)



**Eco-friendly Fully  
Automatic AI Floor Grinder**

**High Tech Grinding System Co.,Ltd**

**Enable the global floor labors to work with health, easiness and happiness**



**FUJIAN XINGYI POLISHING MACHINE CO.,LTD.**

Factory Address:NO.C2,Area 11,Anping Development Area,Quanzhou City,Fujian Province,CHINA

Tel:0086-595-36792992 Fax:0886-595-36792977

Whatsapp/WeChat/viber/Mobile: 0086-15960788816

Website:[www.xy1118.com](http://www.xy1118.com) [www.high-tech-grinding.com](http://www.high-tech-grinding.com)

Email:[admin@polishingmachine.cc](mailto:admin@polishingmachine.cc) [admin@xingyistone.cn](mailto:admin@xingyistone.cn)







# XINGYI ENTERPRISE



Fujian Xingyi Polishing Machine Co.,Ltd is proud to be one of biggest system integrators who provides full-floor polishing products and service in China. Our factory is located in Jinjiang, China, with professional R&D, Designing, Manufacturing, Sales and Customer Support teams. Currently we have 350 employees all over the world. We have very effective and professional machineries, tools and chemicals for the floor polishing industry world wide. Our high-end products are results of mature technologies and experienced workers in our own factory, which covering approximate 15,000sqm.

The productive XY and High Tech Grinding Series Polishing Machines which varies from one head to twelve heads, meeting different construction requirements. Gear-driven machines are user-friendly and productive both in grinding and polishing, so can make excellent polished surfaces. And our machines can work in planetary or rotatory configurations. Moreover, horsepower options range in availability from 20HP, 15HP, 10HP, 7.5HP and more.

We also offer our High Tech Grinding Tools in metal pads and resin pads with fantastic quality and good prices. As for chemicals, we have our High Tech Grinding Chemicals for repairing, hardening, sealing and stone crystallization.

Other than manufacturing, we have our own flooring construction company as well. Burke Concrete Polishing Co.,Ltd has completed many projects in design, grinding and polishing by our own workforce across the globe with materials of concrete, terrazzo, marble, granite and epoxy terrazzo. Burke Company is a branch that belongs to Xingyi Enterprise, having a 20 years history and more than 100 employees and 6 project teams to manage the projects. Xingyi machines and Burke teams have completed many projects world wide, receiving great compliments from our customers.

In addition, we invite our clients from all around the world to our company every March. We get together, share our experience, gain more understanding and establish relationships with each other. And there were more than 160 foreign clients to join us in 2018. We welcome every client with enthusiasm and sincerity.

In closing, we want to emphasize that we have 39 foreign offices across the world so that we can provide a very detailed and fast customer support infrastructure. You can easily get in touch with them and they will serve you with great dedication and patience. Thank you from the Xingyi enterprise team.



## Why choose us ?

1. Quality Assurance: 30 sets CNC machines, 124 patents, without processing from third parties, 15000m<sup>2</sup> factory area, 30% benefit invest for RD, own project team, service for 120 countries, over 5000 old customers in the world(Includes OEM/ODM ).
2. Diversification: Floor systems/product systems/service systems
3. Customer's reputation: 98% customers good feedback.
4. Share of market: 38 office/agent in the world, taking 80% share of market in some countries

Vision: Build a China centurial Xingyi, Realize the creditable enterprise

Mission: Enable the global floor labors to work with health and happiness.

Value: Customer first, perfection oriented, solidify in teamwork, advance with tendency.

Gratefulness and responsibility, respect the competition.

## QUALITY FIRST CUSTOMER ORIENTED





# FOREIGN SERVICE



WOC




Australia



Russia



Taiwan

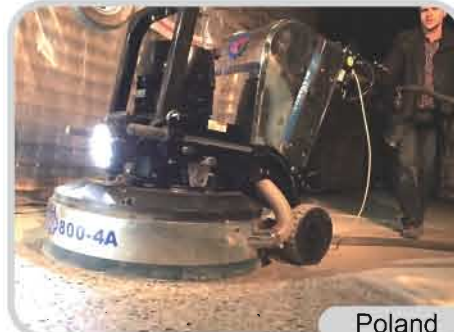

Poland



Mongolia



Turkey



Thailand



Indonesia



Austria



France



Iran

**SERVICE:** Comprehensive after-sales service, providing regular following up. We can solve the customers' questions one by one in emails/phones or face to face by on-site support, which realized one hour quick response. What's more, one year free quality guarantee.



**CAPABILITY:** Modern production and super supply ability

With many sets CNC machine for manufacturing the gears and 30 sets of professional gear grinding machine. **Owned more than 10 designers R&D team**, which designed the most humanized and advanced floor grinding machine, **Independent production, annual output in 5000sets**, allowed for mass production and supply.



**QUALITY:** International quality, Trustworthy.

Strict flow production, all machines required to pass three quality inspection before finished.

**Owned many national certificates: CE, ISO9001, TUV, SGS, ETC etc.**

Combined with the essence of Chinese-American technical, Driven by Gear and motor, the life warranty can be up to 5-10 years.

**Awarded with more than 120 patents, sold to more than 120 countries.**



## FUNCTION DISPLAY:




### 1) Easy operation, more safe and reliable

Collapsible handle, Integrated central control panel design, can be easily adjusting, more safe and reliable, suitable for human ergonomics.



### 2) Multi-model functional choices, which can meet different construction technology requirements.

Automatic pressure control system can suit for different construction technology requirements Equipped with vacuum cleaner device, can work for dry and wet working mode.



### 3) Durability and higher efficiency ,

#### lower construction cost

Multi-functional grinding plate can install different kinds of pads and reduce your construction cost as far as possible. High power motor with inverter, meet requirements for long-time and frequent working in industrial flooring area.



## WHY CHOOSE XINGYI

- 1.Xingyi is the only company doing manufacturing and projects. We have floor engineering company doing all kinds of floors around the world, and we fly to Egypt, Brunei, Malaysia, Thailand, Canada and Australia etc countries doing polishing and guiding clients.
- 2.Xingyi is the only company manufacturing machines, pads and chemical. We can provide the system products for your flooring business with factory price and quality control advantages.
- 3.Xingyi keeps innovation and release new products every year to keep you move forward with industry trends.
4. Xingyi machines are productive, easy to use and have good polishing result as the weight and power design.
- 5.Xingyi machines are driven by the gear system, giving you reliability and performance you need.
- 6.Xingyi machines have options for planetary rotary, planetary, and cross-cut models with 4 heads, 3 heads and 2 heads.
7. Xingyi supports engineering skills. When you get projects and need us to guide the polishing, we will fly to your country with our polishing teams.

## MACHINE CODE REFERENCE:

A: Automatic Self-propelled floor grinder  
 E: Exclusive Remote control floor grinder  
 R: Robot floor grinder  
 D: Classic Xingyi Q series floor grinder  
 V: Classic Xingyi X series floor grinder  
 I: Integrated gearbox floor grinder

C: Cleaner with floor grinder in one  
 CC: Combo of Concrete/Terrazzo floor polishing system and training.  
 CM: Combo of Marble polishing system and training  
 CG: Combo of Granite polishing system and training  
 P: Power Plus  
 HP: High speed Polisher

## MACHINE WARRANTY

Guarantee	Motor	Inverter	Gear	Bearing	Rubber Cushion, Electrical Part
Xingyi	One year	One year	Two years	One years	Three months
HIGH TECH GRINDING	One year	One year	Two years	One years	Three months

### TOP 10 Sale List in 2018-2019 (380V three phase)

No.1: 800-4A No.2: 750-3D No.3: 700LE No.4: 800-4E  
 No.5: 580-2 No.6: 680-4A No.7: 600-4i No.8: 700HP  
 No.9: 900-4A No.10: 680-4

### TOP 10 Sale List in 2018-2019 (220V single phase)

No.1: 550-3D No.2: 500-4i No.3: 550-3V No.4: HTG 250  
 No.5: HTG-250VS No.6: HTG-480 No.7: 460-3V No.8: 460-3D  
 No.9: XY-78K No.10: XY-175AE

MODEL	POWER	ROTATING SPEED	KG WEIGHT	VOLTAGE AMPERAGE	WORKING WIDTH	INVERTER
800-4R	15KW/20HP	450-1950rpm	580kg/1279lbs	220-240V/53A 380-440V/30.1A three phase	800mm (256mm*4)	380V 18.5KW/25HP 220V 15KW/20HP
800-4E	15KW/20HP	450-1950rpm	555kg/1224lbs	220-240V/53A 380-440V/30.7A three phase	800mm (256mm*4)	380V 18.5KW/25HP 220V 15KW/20HP
800-4A	15KW/20HP	450-1950rpm	540kg/1190lbs	220-240V/53A 380-440V/30.7A three phase	800mm (256mm*4)	18.5KW/25HP
700-4A	15KW/20HP	350-1680rpm	535kg/1180lbs	220-240V/53A 380-440V/30.7A three phase	700mm (370mm*4)	18.5KW/25HP
680-4A	9.5KW/13HP	350-1680rpm	425kg/937lbs	220-240V/34.6A 380-440V/20A three phase	680mm (230mm*4)	11KW/15HP
900-4E	15KW/20HP	450-1950rpm	600kg/1323lbs	220-240V/50.5A 380-440V/30.7A three phase	860mm (315mm*4)	380V 18.5KW/25HP 220V 15KW/20HP
900-4A	15KW/20HP	450-1950rpm	650kg/1433lbs	220-240V/53A 380-440V/30.7A three phase	860mm (315mm*4)	18.5KW/25HP
700HP	9.5KW/13HP	450-1500rpm	208kg/459lbs	220-240V 32.7A 380-440V 19A three phase	700mm	11KW/15HP

MODEL	POWER	ROTATING SPEED	KG WEIGHT	VOLTAGE AMPERAGE	WORKING WIDTH	INVERTER
800-4P	35HP	1400-1800rpm	650kg/1433lbs		800mm (256mm*4)	
RPG-800	15KW/20HP	350-1950rpm	580.5kg/1280lbs	220-240V/34.08A 380-440V/20.A three phase	800mm (256mm*4)	380V 18.5KW/25HP 220V 15KW/20HP
700LE	15KW/20HP	450-1680rpm	445kg/981lbs	220-240V/55.5A 380-440V/32.23A three phase	700mm (340mm*4)	380V 15KW/25HP 220V 18.5KW/25HP
480	2.2KW/3HP	360rpm	160kg/353lbs	220V/50HZ 10A single phase	480mm	
250	2.2KW/3HP	1460/1735rpm	65.5kg/140lbs	220V 10A single phase	250mm	3.7KW/5HP 4KW/5HP
250VS	3KW/4HP	350-1200rpm	70kg/154lbs	220V 13.6A 380V 6.58A three phase		
HP-27S	7.5KW/10HP	450-1500rpm	180kg/397lbs	220-240V 32.7A 380-440V 19A three phase	27inch	220V 11KW/15HP 380V 7.5KW/10HP
580-2G		0-2800rpm	198kg/437lbs		580mm (310mm*2)	11KW/15HP
750-3D	11KW/15HP	450-1950rpm	340kg/750lbs	220-240V/41.55A 380-440V/24.09A three phase	750mm (256mm*3)	15KW/20HP
750-3V	11KW/15HP	350-1950rpm	340kg/750lbs	220-240V/41.55A 380-440V/24.09A three phase	750mm (256mm*3)	380V 11KW/15HP 220V 15KW/20HP
700-4i	11KW/15HP	450-1950rpm	358kg/789lbs	220-240V/53A 380-440V/30.7A three phase	700mm (348mm*4)	11KW/15HP
600-4i	7.5KW/10HP	350-1680rpm	235kg/518lbs	220-240V/29.3A 380-440V/17.05A three phase	600mm (320mm*4)	7.5KW/10HP
500-4i	5.5KW/7.5HP	350-1500rpm	175kg/386lbs	220V 25A single phase 220V 19A 380V 11A three phase	500mm (270mm*4)	7.5KW/10HP 5.5KW/7.5HP
640-3D	7.5KW/10HP	450-1950rpm	267kg/589lbs	220-240V/27.0A 380-440V/15.6A three phase	640mm (200mm*3)	11KW/15HP
640-3V	7.5KW/10HP	350-1680rpm	267kg/589lbs	220-240V/27.0A 380-440V/15.6A three phase	640mm (200mm*3)	7.5KW/10HP
550-3DP	5.5KW/7.5HP	350-1260rpm 350-1680rpm	183kg/403bs	220-240V 25A single phase 220V 22.11A 380V 12.76A three phase	550mm (230mm*3)	11KW/15HP 7.5KW/10HP
550-3VP	5.5KW/7.5HP	350-1680rpm	183kg/403bs	220-240V/20.3A 380-440V/11.7A three phase	550mm (230mm*3)	380V 5.5KW/7.5HP 220V 7.5KW/7.5HP
550-3D	4KW/5.5HP	350-1460rpm	165kg/364lbs	220V/16.61A single phase 380V/9.57A three phase	550mm (230mm*3)	7.5KW/10HP 5.5KW/7.5HP
550-3V	4KW/5.5HP	350-1260rpm	165kg/364lbs	220-240V/18.2A single phase	550mm (230mm*3)	5.5KW/7.5HP
460-3D	3KW/4HP	350-1460rpm	150kg/331lbs	220-240V/13.6A single phase	460mm (200mm*3)	3.7KW/5HP
460-3V	3KW/4HP	350-1226rpm	150kg/331lbs	220-240V/13.6A single phase	460mm (200mm*3)	4KW/5HP
580-2D	7.5KW/10HP	350-1680rpm	181kg/399lbs	220-240V/29.37A 380-440V/17.05A three phase	570mm (310mm*2)	11KW/15HP
580-2	7.5KW/10HP	1460rpm	175kg/386lbs	380-440V/15.6A three phase	570mm (310mm*2)	
1500-9D	12KW/16.5HP	450-1680rpm	495kg/1091lbs	220-240V/45.0A 380-440V/25.98A three phase	1400mm (230mm*9)	15KW/20HP
1500-9V	12KW/16.5HP	350-1680rpm	495kg/1091lbs	220-240V/45.0A 380-440V/25.98A three phase	1400mm (230mm*9)	15KW/20HP



# GENERATION 6

HIGH TECH GRINDING RPG-800



REMOTE CONTROL GRINDER



FLOOR GRINDING MACHINE

## WHY CHOOSE US

Semi-auto more easier



FLOOR GRINDING MACHINE

### TECHNICAL PARAMETER

RPG-800 CC: Concrete Polishing Systems

POWER	15KW/20HP	VOLTAGE AMPERAGE	220-240V 380-440V/30.7A / three phase
ROTATING SPEED	350-1950rpm	WORKING WIDTH	800mm (256mm*4)
WEIGHT	580.5kg/1280lbs	INVERTER	380V 18.5KW/25HP 220V 15KW/20HP


### OPERATING AT SITE





# GENERATION 6

HIGH TECH GRINDING 800-4P

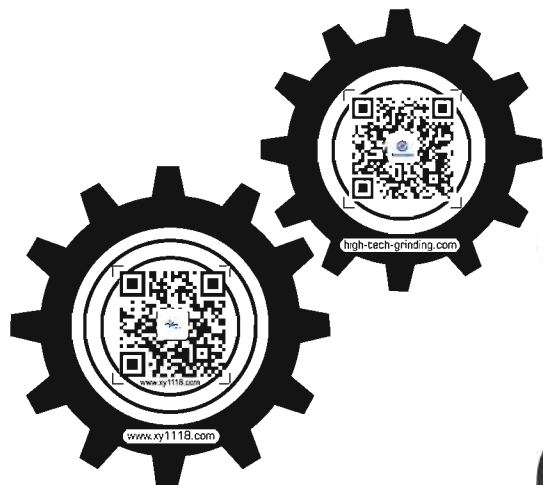

FLOOR GRINDING MACHINE

FLOOR GRINDING MACHINE







## WHY CHOOSE US

Semi-auto more easier

### TECHNICAL PARAMETER

800-4P CC: Concrete Polishing Systems

	POWER	35HP		ROTATING SPEED	1400-1800rpm
	WEIGHT	650kg/1433lbs		WORKING WIDTH	800mm (256mm*4)

### OPERATING AT SITE





# GENERATION 6

HIGH TECH GRINDING 800-4E



REMOTE CONTROL GRINDER



FLOOR GRINDING MACHINE

FLOOR GRINDING MACHINE

## WHY CHOOSE US

Semi-auto more easier



### TECHNICAL PARAMETER

800-4E CC: Concrete Polishing Systems

POWER	15KW/20HP	VOLTAGE AMPERAGE	220-240V/53A / 380-440V/30.7A / three phase
ROTATING SPEED	450-1950rpm	WORKING WIDTH	800mm (256mm*4)
WEIGHT	555kg/1224lbs	INVERTER	380V 18.5KW/25HP / 220V 15KW/20HP

### OPERATING AT SITE





# GENERATION 6

HIGH TECH GRINDING 800-4A



SELF-PROPELLED GRINDER



FLOOR GRINDING MACHINE

FLOOR GRINDING MACHINE

## WHY CHOOSE US

Semi-auto more easier



## OPERATING AT SITE



### TECHNICAL PARAMETER

800-4A CC: Concrete Polishing Systems

POWER	15KW/20HP	VOLTAGE AMPERAGE	220-240V/53A / 380-440V/30.7A / three phase
ROTATING SPEED	450-1950rpm	WORKING WIDTH	800mm (256mm*4)
WEIGHT	540kg/1190lbs	INVERTER	18.5KW/25HP



# GENERATION 6

HIGH TECH GRINDING 800-4R (Auto Robot)



## WHY CHOOSE US

Automatic Robot more easier



FLOOR GRINDING MACHINE

FLOOR GRINDING MACHINE

## OPERATING AT SITE



### TECHNICAL PARAMETER

800-4R Auto Robot Floor Grinder / 800-4RPG Rocket-propelled grenade floor grinder

POWER	15KW/20HP	VOLTAGE AMPERAGE	220-240V/53A / 380-440V/30.1A / three phase
ROTATING SPEED	450-1950rpm	WORKING WIDTH	800mm (256mm*4)
WEIGHT	580kg/1279lbs	INVERTER	380V 18.5KW/25HP / 220V 15KW/20HP



# GENERATION 6

HIGH TECH GRINDING 700-4A



SELF-PROPELLED GRINDER



FLOOR GRINDING MACHINE

FLOOR GRINDING MACHINE

## WHY CHOOSE US

Semi-auto more easier









## OPERATING AT SITE



### TECHNICAL PARAMETER

700-4A CC: Concrete Polishing Systems

 POWER	15KW/20HP	 VOLTAGE AMPERAGE	220-240V/53A / 380-440V/30.7A / three phase
 ROTATING SPEED	450-1950rpm	 WORKING WIDTH	700mm (370mm*4)
 WEIGHT	535kg/1180lbs	 INVERTER	18.5KW/25HP



# GENERATION 6

HIGH TECH GRINDING 680-4A



FLOOR GRINDING MACHINE



SELF-PROPELLED GRINDER

## WHY CHOOSE US

Semi-auto more easier



FLOOR GRINDING MACHINE

### TECHNICAL PARAMETER

680-4A CC: Concrete Polishing Systems

POWER	9.5KW/13HP	VOLTAGE AMPERAGE	220-240V/34.6A / 380-440V/20A / three phase
ROTATING SPEED	350-1680rpm	WORKING WIDTH	680mm (230mm*4)
WEIGHT	425kg/937lbs	INVERTER	11KW/15HP

### OPERATING AT SITE











# GENERATION 5

## HIGH TECH GRINDING 900-4E



### TECHNICAL PARAMETER

900-4E Remote Control Grinder

 POWER	15KW/20HP
 ROTATING SPEED	450-1950rpm
 WEIGHT	600kg/1323lbs
 VOLTAGE AMPERAGE	220-240V/50.5A 380-440V/29.3A three phase
 WORKING WIDTH	860mm (315mm*4)
 INVERTER	380V 18.5KW/25HP 220V 15KW/20HP







# GENERATION 5

## HIGH TECH GRINDING 700HP



### TECHNICAL PARAMETER

700HP HIGH SPEED POLISHER

 POWER	9.5KW/13HP
 ROTATING SPEED	350-1460rpm
 WEIGHT	208kg/459lbs
 VOLTAGE AMPERAGE	220-240V/32.7A 380-440V/19A three phase
 WORKING WIDTH	700mm
 INVERTER	11KW/15HP







# GENERATION 5

## HIGH TECH GRINDING 900-4A



### TECHNICAL PARAMETER

900-4A SELF-PROPELLED GRINDER

 POWER	15KW/20HP
 ROTATING SPEED	450-1950rpm
 WEIGHT	650kg/1433lbs
 VOLTAGE AMPERAGE	220-240V/53A 380-440V/30.7A three phase
 WORKING WIDTH	860mm (315mm*4)
 INVERTER	18.5KW/25HP







# GENERATION 5

## HIGH TECH GRINDING 480



### TECHNICAL PARAMETER

480 FLOOR GRINDER

 POWER	2.2KW/3HP
 ROTATING SPEED	360rpm
 WEIGHT	160kg/353lbs
 Addition Weight	10kg/22lbs*2
 VOLTAGE AMPERAGE	220-240V 10A/50HZ single phase
 WORKING WIDTH	480mm



## GENERATION 4 HIGH TECH GRINDING



250VS  
FLOOR GRINDING MACHINE

250  
FLOOR GRINDING MACHINE

### TECHNICAL PARAMETER FLOOR GRINDING MACHINE

 POWER	3KW/4HP	2.2KW/3HP
 ROTATING SPEED	350-1250rpm	1735rpm 1460rpm
 WEIGHT	70kg/154lbs	65.5kg/140lbs
 VOLTAGE AMPERAGE	220-240V 50/60HZ 10A single phase 380-440V 50/60HZ three phase	220-240V 60HZ 10A single phase 220-240V 50HZ 10A single phase
 WORKING WIDTH	250mm	250mm
 INVERTER	3.7KW/5HP	4KW/5HP



## GENERATION 4 HIGH TECH GRINDING HP-27S

### TECHNICAL PARAMETER HP-27S HIGH SPEED POLISHER

 POWER	7.5KW/10HP
 ROTATING SPEED	350-1460rpm
 WEIGHT	180kg/397lbs
 VOLTAGE AMPERAGE	220-240V/32.7A 380-440V/19A three phase
 WORKING WIDTH	27inch
 INVERTER	220V 11KW/15HP 380V 7.5KW/10HP

## GENERATION 4 HIGH TECH GRINDING 700P



### TECHNICAL PARAMETER 700P Propane High Speed Polisher

 POWER	23HP
 ROTATING SPEED	1800rpm
 WEIGHT	173kg/381lbs
 WORKING WIDTH	27inch

## GENERATION 6 Tank-2500 FEco-friendly Fully Automatic AI Floor Grinder



### TECHNICAL PARAMETER Tank-2500 HIGH SPEED POLISHER

 POWER	200HP
 WEIGHT	5.5T/12125lbs
 WORKING WIDTH	2200mm 256mm*4*4
 GRINDING PRESSURE	0-550kg



# GENERATION 4

XINGYI MACHINE 750-3D



## TECHNICAL PARAMETER

750-3D Floor Grinding Machine

POWER	11KW/15HP
ROTATING SPEED	450-1950rpm
WEIGHT Addition Weight	340kg/750lbs 40kg/88lbs
VOLTAGE AMPERAGE	220-240V/41.55A 380-440V/24.09A three phase
WORKING WIDTH	750mm (256mm*3)
INVERTER	15KW/20HP

D Series Accessories:  
1 additional weight, 1 dust skirt, 6-18 adapters,  
2 carrying pole, 1 plug, 10m cable, instruction book, 1 LED light

# GENERATION 4

XINGYI MACHINE 700-4i



## TECHNICAL PARAMETER

700-4i Floor Grinding Machine

POWER	15KW/20HP
ROTATING SPEED	450-1950rpm
WEIGHT	358kg/789lbs
VOLTAGE AMPERAGE	220-240V/53A 380-440V/30.7A three phase
WORKING WIDTH	700mm (348mm*4)
INVERTER	15KW/20HP

# GENERATION 4

XINGYI MACHINE 750-3V



## TECHNICAL PARAMETER

750-3V Floor Grinding Machine

POWER	11KW/15HP
ROTATING SPEED	450-1950rpm
WEIGHT Addition Weight	340kg/750lbs 40kg/88lbs
VOLTAGE AMPERAGE	220-240V/41.55A 380-440V/24.09A three phase
WORKING WIDTH	750mm (256mm*3)
INVERTER	380V 11KW/15HP 220V 15KW/20HP

V Series Accessories:  
1 additional weight, 1 dust skirt, 6-18 adapters,  
2 carrying pole, 1 plug

# GENERATION 4

XINGYI MACHINE 700LE



## TECHNICAL PARAMETER

700LE Floor Grinding Machine

POWER	15KW/20HP
ROTATING SPEED	350-1500rpm
WEIGHT	445kg/981lbs
VOLTAGE AMPERAGE	220-240V/55.55A 380-440V/32.23A three phase
WORKING WIDTH	700mm (348mm*4)
INVERTER	380V 15KW/20HP 220V 18.5KW/25HP



# GENERATION 4

XINGYI MACHINE 600-4i



## TECHNICAL PARAMETER

600-4i Floor Grinding Machine

	POWER	7.5KW/10HP
	ROTATING SPEED	350-1680rpm
	WEIGHT Addition Weight	235kg/518lbs 30kg/66lbs
	VOLTAGE AMPERAGE	220-240V/29.3A 380-440V/17.05A three phase
	WORKING WIDTH	600mm (320mm*4)
	INVERTER	7.5KW/10HP

# RIDE-ON FLOOR SCRUBBER XY-70A

## TECHNICAL PARAMETER

XY-70A RIDE-ON FLOOR SCRUBBER

Weight	208kg
Voltage	DC 24V 12*2
Water Sucker Width	800mm
Cleaning Width	550mm
Brush Rotation Speed	3400m /h
Running Speed	0-5.5km/h
Floor Motor	500W
Driving Motor	300W
Water Sucker Motor	450W
Clean Water Tank Capacity	70L
Dirty Water Tank Capacity	70L
Battery	12V-105AHX2
Working Time	3.5-5Hour
Charge Time	8Hour
Clean Water Tank Capacity	70L
Dirty Water Tank Capacity	70L



# GENERATION 4

XINGYI MACHINE 500-4i



## TECHNICAL PARAMETER

500-4i FLOOR GRINDING MACHINE

	POWER	5.5KW/7.5HP	5.5KW/7.5HP
	ROTATING SPEED	350-1460rpm	350-1460rpm
	WEIGHT Addition Weight	175kg/385.8lbs	175kg/386lbs
	VOLTAGE AMPERAGE	220-240V 25A 50/60HZ single phase	220-240V 19A 380-440V 11A 50/60HZ three phase
	WORKING WIDTH	500mm (270mm*4)	500mm (270mm*4)
	INVERTER	7.5KW/10HP	5.5KW/7.5HP

# GENERATION 4

XINGYI MACHINE

## TECHNICAL PARAMETER

FLOOR GRINDING MACHINE

	640-3D	640-3V	
	POWER	7.5KW/10HP	7.5KW/10HP
	ROTATING SPEED	350-1680rpm	350-1680rpm
	WEIGHT Addition Weight	267kg/589lbs 40kg/88lbs	267kg/589lbs 40kg/88lbs
	VOLTAGE AMPERAGE	220-240V/27.0A 380-440V/15.6A three phase	220-240V/27.0A 380-440V/15.6A three phase
	WORKING WIDTH	640mm (200mm*3)	640mm (200mm*3)
	INVERTER	11KW/15HP	7.5KW/10HP

D Series Accessories:

- 1 additional weight, 1 dust skirt, 6-18 adapters,
- 2 carrying pole, 1 plug, 10m cable, instruction book,
- 1 LED light

V Series Accessories:

- 1 additional weight, 1 dust skirt, 6-18 adapters,
- 2 carrying pole, 1 plug





# GENERATION 4

XINGYI MACHINE 550-3DP



## TECHNICAL PARAMETER 550-3DP FLOOR GRINDING MACHINE

 POWER	5.5KW/7.5HP	5.5KW/7.5HP
 ROTATING SPEED	350-1260rpm	350-1680rpm
 WEIGHT Addition Weight	183kg/403.45lbs 30kg/66lbs	183kg/403lbs 30kg/lbs
 VOLTAGE AMPERAGE	220-240V 25A single phase	220-240V 22.11A 380-440V 12.76A 50/60HZ three phase
 WORKING WIDTH	550mm (230mm*3)	550mm (230mm*3)
 INVERTER	11KW/15HP	7.5KW/10HP

D Series Accessories:  
1 additional weight, 1 dust skirt, 6-18 adapters,  
2 carrying pole, 1 plug, 10m cable, instruction book, 1 LED light

# GENERATION 4

XINGYI MACHINE 550-3D



## TECHNICAL PARAMETER 550-3D FLOOR GRINDING MACHINE

 POWER	4KW/5.5HP	4KW/5.5HP
 ROTATING SPEED	350-1260rpm	350-1460rpm
 WEIGHT Addition Weight	165kg/364lbs 30kg/66lbs	165kg/364lbs 30kg/lbs
 VOLTAGE AMPERAGE	220-240V 50/60HZ 16.61A single phase	380-440V 50/60HZ 9.57A three phase
 WORKING WIDTH	550mm (230mm*3)	550mm (230mm*3)
 INVERTER	7.5KW/10HP	5.5KW/7.5HP


D Series Accessories:  
1 additional weight, 1 dust skirt, 6-18 adapters,  
2 carrying pole, 1 plug, 10m cable, instruction book, 1 LED light

# GENERATION 4

XINGYI MACHINE 550-3VP



## TECHNICAL PARAMETER 550-3VP FLOOR GRINDING MACHINE

 POWER	5.5KW/7.5HP
 ROTATING SPEED	350-1680rpm
 WEIGHT Addition Weight	183kg/403lbs 30kg/66lbs
 VOLTAGE AMPERAGE	220-240V/20.3A 380-440V/11.7A three phase
 WORKING WIDTH	550mm (230mm*3)
 INVERTER	220V 7.5KW/10HP 380V 5.5KW/7.5HP






V Series Accessories:  
1 additional weight, 1 dust skirt, 6-18 adapters,  
2 carrying pole, 1 plug

# GENERATION 4

XINGYI MACHINE 550-3V



## TECHNICAL PARAMETER 550-3V FLOOR GRINDING MACHINE


 POWER	4KW/5.5HP
 ROTATING SPEED	350-1260rpm
 WEIGHT Addition Weight	165kg/364lbs 30kg/66lbs
 VOLTAGE AMPERAGE	220-240V/18.2A single phase
 WORKING WIDTH	550mm (230mm*3)
 INVERTER	5.5KW/7.5HP

V Series Accessories:  
1 additional weight, 1 dust skirt, 6-18 adapters,  
2 carrying pole, 1 plug



# GENERATION 4

XINGYI MACHINE 460-3D



## TECHNICAL PARAMETER 460-3D FLOOR GRINDING MACHINE

POWER	3KW/4HP
ROTATING SPEED	350-1260rpm
WEIGHT Addition Weight	150kg/331lbs 30kg/66lbs
VOLTAGE AMPERAGE	220-240V/13.6A single phase
WORKING WIDTH	460mm (200mm*3)
INVERTER	3.7KW/5HP

D Series Accessories:  
1 additional weight, 1 dust skirt, 6-18 adapters,  
2 carrying pole, 1 plug, 10m cable, instruction book,  
1 LED light

# GENERATION 4

XINGYI MACHINE 580-2D




## TECHNICAL PARAMETER 580-2D FLOOR GRINDING MACHINE

POWER	7.5KW/10HP
ROTATING SPEED	350-1680rpm
WEIGHT	181kg/399lbs
VOLTAGE AMPERAGE	220-240V/29.37A 380-440V/17.05A three phase
WORKING WIDTH	580mm (310mm*2)
INVERTER	11KW/15HP

D Series Accessories:  
1 additional weight, 1 dust skirt, 6-18 adapters,  
2 carrying pole, 1 plug, 10m cable, instruction book,  
1 LED light

# GENERATION 4

XINGYI MACHINE 460-3V



## TECHNICAL PARAMETER 460-3V FLOOR GRINDING MACHINE

POWER	3KW/4HP
ROTATING SPEED	350-1226rpm
WEIGHT Addition Weight	150kg/331lbs 30kg/66lbs
VOLTAGE AMPERAGE	220-240V/13.6A single phase
WORKING WIDTH	460mm (200mm*3)
INVERTER	4KW/5HP

V Series Accessories:  
1 additional weight, 1 dust skirt, 6-18 adapters,  
2 carrying pole, 1 plug

# GENERATION 4

XINGYI MACHINE 580-2



## TECHNICAL PARAMETER 580-2 FLOOR GRINDING MACHINE

POWER	7.5KW/10HP
ROTATING SPEED	1460rpm
WEIGHT	175kg/386lbs
VOLTAGE AMPERAGE	380-440V/15.6A three phase
WORKING WIDTH	580mm (310mm*2)



# GENERATION 6

HIGH TECH GRINDING IVC-55A



### TECHNICAL PARAMETER IVC-55A INDUSTRIAL VACUUM CLEANER

 POWER	5.5KW/7.5HP
 AIR FLOW RATE SUCTION DIAMETER	600m³/h (50/80mm)
 WEIGHT	282.5kg/623lbs
 VOLTAGE AMPERAGE	220-240V/19A 380-440V/11A three phase

Automatic dust clean

# GENERATION 6

HIGH TECH GRINDING IVC-33A



### TECHNICAL PARAMETER IVC-33A INDUSTRIAL VACUUM CLEANER

 POWER	3.3KW/4.5HP
 AIR FLOW RATE SUCTION DIAMETER	420m³/h (50mm)
 WEIGHT	150.5kg/332lbs
 VOLTAGE AMPERAGE	220V 50/60HZ 15A 110V 50/60HZ 28A

Automatic dust clean

# GENERATION 5

HIGH TECH GRINDING IVC-55L



### TECHNICAL PARAMETER IVC-55L INDUSTRIAL VACUUM CLEANER

 POWER	5.5KW/7.5HP
 AIR FLOW RATE SUCTION DIAMETER	600m³/h (50/80mm)
 WEIGHT	252kg/556lbs
 VOLTAGE AMPERAGE	220-240V/19A 380-440V/11A three phase

Manual dust clean

# GENERATION 5

HIGH TECH GRINDING IVC F-65L



### TECHNICAL PARAMETER IVC F-65L INDUSTRIAL VACUUM CLEANER

 POWER	2.2KW/3HP
 AIR FLOW RATE SUCTION DIAMETER	350m³/h (50mm)
 WEIGHT	68kg/150lbs
 VOLTAGE AMPERAGE	220V 50/60HZ 10A

Manual dust clean



# STONE MAINTAINCE SERIER

# STONE MAINTAINCE SERIER

**XY-175AE**  
Technical Parameter



1.5KW/2HP	220-240V 50HZ/60HZ
175rpm	17inch
78kg/172lbs	

**XY-175A**  
Technical Parameter



1.8KW/2.5HP	220-240V 50HZ/60HZ
175rpm	17inch
78kg/172lbs	

**XY-175B**  
Technical Parameter



1.5KW/2HP	220-240V 50HZ/60HZ
175rpm	17inch
55kg/121lbs	

**XY-175D**  
Technical Parameter



1.8KW/2.5HP	220-240V 50HZ/60HZ
175rpm	17inch
78kg/172lbs	



**HTG-XY300A**  
Technical Parameter

4KW/5.5HP	2080rpm
98kg/216lbs	220-240V single phase
300mm	

**HTG-XY300B**  
Technical Parameter

4KW/5.5HP	2080rpm
98kg/216lbs	380-440V three phase
300mm	

Electric box  
(15A/32A)



**Drawing**



Additional Weight



17" floor Polishing Disc



Alloy Handle



Easy Disassembly Handle Design



Easy Disassembly Handle Design

**AS15**

Technical Parameter

1KW/1.3HP	15L
48L/S	220-240V

**AS30**

Technical Parameter

1KW/1.3HP	30L
53L/S	220-240V

**AS60**

Technical Parameter

2KW/2.7HP	60L
106L/S	220-240V



**XY-38K**

Technical Parameter



0.75KW/1HP	220V
176rpm	250mm
40kg/88lbs	

**XY-78K**

Technical Parameter



1.8KW/2.5HP	220-240V 50HZ
176rpm	17inch
78kg/172lbs	

**XY-88K**

Technical Parameter



1.8KW/2.5HP	220-240V 50HZ
150rpm	20inch
75kg/165lbs	



Available For Many Kinds Of Abrasives



Pad Holder

**XY-N836**

Technical Parameter



16.2KW/22HP	340kg/750lbs
70-150/3600rpm	1910mm (970mm(355*150mm*8)*2)

**XY-N436**

Technical Parameter



4KW/5.5HP	80kg/176lbs
70-150/3600rpm	940mm (970mm(355*150mm*4))

**XY-250**

Technical Parameter



Honda GX270/GX390	132kg/291lbs
6	250mm



Tools



Stone cutting machine



hand polisher(7 inches) D51801



hand polisher(4 inches) My3007



Engraving Machine



Feeler gauge/guiding rule



Floor Shovel



Marble Glue



0.2mm / 0.3mm / 0.5mm Cutting Blade



Plastic/Stainless Steel Glass Scraper



Wool Mat



Marble Glue Color

<b>HTG-G2W</b> Segments Size: 38*10*12 Grit: 30# 60# 120# Application: Wet/Dry	<b>HTG-G2S</b> Segments Size: 26*26*12 Grit: 30# 60# 120# Application: Wet/Dry	<b>HTG-G2I</b> Segments Size: 32*7*12 Grit: 30# 60# 120# Application: Wet/Dry	<b>HTG-2S-E</b> Segments Size: 3-9mm*2*ø24*13.5 Grit: 30#60#120# Application: Wet/Dry
<b>HTG-2S</b> Segments Size: 3-9mm*2*ø24*13.5 Grit: 30#60#120# Application: Wet/Dry	<b>HTG-2Y</b> Segments Size: 3-9mm*2*ø24*13 Grit: 6#16#20#30#60#80#120#150#300# Application: Wet/Dry	<b>HTG-C2</b> Segments Size: 3-9mm*2*11*11*40 Grit: 30#60#120# Application: Wet/Dry	<b>HTG-C2-E</b> Segments Size: 3-9mm*2*11*11*40 Grit: 30#60#120# Application: Wet/Dry
<b>HTG-2C</b> Segments Size: 3-9mm*2*12*12*38 Grit: 6#16#20#30#60#80#120#150#300# Application: Wet/Dry	<b>HTG-3Y</b> Segments Size: 3*ø24*12 Grit: 6#16#20#30#60#80#120#150#300# Application: Wet/Dry	<b>HTG-HT-2Y</b> Segments Size: H-2*ø24*13 Grit: 6#16#20#30#60#80#120#150#300# Application: Wet/Dry	<b>HTG-HT-2L</b> Segments Size: H-2*12*15*35 Grit: 6#16#20#30#60#80#120#150#300# Application: Wet/Dry
<b>HTG-HT-2C</b> Segments Size: H-2*10*10*40 Grit: 6#16#20#30#60#80#120#150#300# Application: Wet/Dry	<b>HTG-2PCD</b> Size: 38*12*12/40*10*10 Application: Dry grinding	<b>HTG-2PCD+1C</b> Size: 3-9mm*3*1/3PCD+ Protection Segments Application: Dry grinding	<b>HTG-2PCD</b> Size: 2*1/4PCD Application: Dry grinding
<b>HTG-H2L</b> Size: 2*13*14*33 Grit: 30#40#60#80#100#120# Application: Wet/Dry	<b>HTG-10T-8B</b> Size: 80mm3*10*8 Grit: 30#50#100# Application: Dry	<b>HTG-4T5K</b> Size: 100mm(Diameter) Grit: 30#60#80#150#300# Application: Dry	<b>HTG-4JR</b> Size: 100*7 Grit: 30#50#100# Application: Wet/Dry Note: Good for Concrete, Granite Grinding
<b>HTG-3T4K</b> Size: 3.5inches-3*32*14/9.5*13 Grit: 30#60#120# Application: Dry	<b>HTG-4T4K</b> Size: 4inches-4*40*12*12 Grit: 30#60#120# Application: Dry	<b>HTG-4T5S</b> Size: 4inches-4*11*11*40 Grit: 30#60#120# Application: Dry	<b>HTG-2J</b> Size: 3-9mm 2*27*20*15 Grit: 30# Application: Dry





**HTG-C310**

Size: ø3inch(Diameter) 10mm(Thickness)  
Grit: 50#100#200#400#  
Application: Dry Polishing

**HTG-XZ**


Size: ø3inch(Diameter) 10mm(Thickness)  
Grit: 50#100#200#400#800#1500#3000#  
Application: Dry Polishing

**HTG-C356**

Size: ø3.5inch(Diameter) 8mm(Thickness)  
Grit: 50#100#200#  
Application: Dry Polishing

**HTG-3FJS**

Size: ø3inch(Diameter) 12mm(Thickness)  
Grit: 50#100#200#  
Application: Dry/Wet Polishing

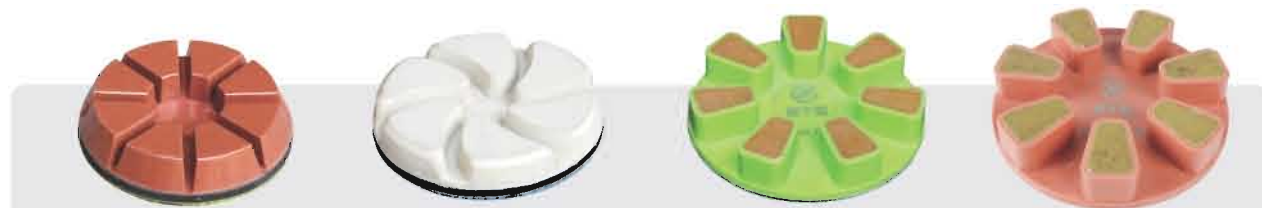

**HTG-8CD**

Size: ø3/ø4inch(Diameter) 12mm(Thickness)  
Grit: 50#100#200#400#800#1500#3000#  
Application: Dry Polishing

**HTG-310A**

Size: ø3inch(Diameter) 8mm(Thickness)  
Grit: 50#100#200#400#800#1500#3000#  
Application: Dry Polishing

**HTG-7CD**

Size: ø4inch(Diameter) 14mm(Thickness)  
Grit: 50#100#200#400#  
Application: Dry Polishing

**HTG-7CW**

Size: ø4inch(Diameter) 14mm(Thickness)  
Grit: 50#100#200#400#  
Application: Wet Polishing



**HTG-C410**

Size: 100mm  
Grit: 50#100#200#400#800#1500#3000#  
Application: Wet Polishing

**HTG-CDM**


Size: 4inch (Diameter) 10mm (Thickness)  
Grit: 50#100#200#400#  
Application: dry polishing

**HTG-C405**

Size: ø4inch(Diameter) 5mm(Thickness)  
Grit: 800#1500#3000#  
Application: Dry Polishing

**HTG-P16**

Size: ø3/ø4inch(Diameter) 10mm(Thickness)  
Grit: 50#100#200#400#800#1500#3000#  
Application: Wet Polishing

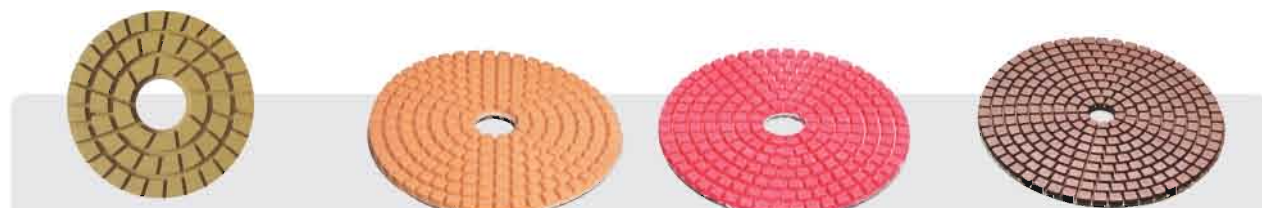

**HTG-R9**

Size: 220mm(Diameter) 6mm(Thickness)  
Grit: 30#50#100#200#500#1000#2000#3000#6000#  
Application: Wet Polishing

**HTG-JA3/4/5**

Size: ø3/ø4/ø5inch(Diameter) 3mm(Thickness)  
Grit: 50#150#300#500#1000#2000#3000#  
Application: Wet Polishing

**HTG-JN3/4/5**

Size: ø3/ø4/ø5inch(Diameter) 3mm(Thickness)  
Grit: 50#150#300#500#1000#2000#3000#  
Application: Wet Polishing

**HTG-3XA/4XA**

Size: ø3/ø4inch(Diameter) 3mm(Thickness)  
Grit: 50#150#300#500#1000#2000#3000#  
Application: Wet Polishing



**HTG-XMD3/XMD4**

Size: ø3/ø4inch(Diameter) 3mm(Thickness)  
Grit: 50#100#200#400#800#1500#3000#  
Application: Dry Polishing

**HTG-6G**

Size: 80mm\*6  
Grit: 30#50#  
Application: Wet Polishing

**HTG-F23**

Size: ø3inch(Diameter) 10mm(Thickness)  
Grit: 50#100#200#400#800#1500#3000#  
Application: Dry Polishing

**HTG-4CWA**

Size: ø4inch(Diameter) 3mm(Thickness)  
Grit: 50#100#200#400#800#1500#3000#  
Application: Wet Polishing



**HTG-088-4B**

Size: ø3inch(Diameter) 10mm(Thickness)  
Grit: 50#100#200#400#800#1500#3000#  
Application: Wet Polishing

**HTG-B3/B4**

Size: ø3inch(Diameter) 14mm(Thickness)  
Grit: 1000#2000#3000#6000#10000#  
Application: Dry Polishing

**HTG-DIP-HD027**

Size: ø27inch  
Grit: 400#800#1500#3000#6000#10000#  
Application: Dry Polishing



**Floor pads**

Size: ø17 ø27  
Color: Red/White/Black  
Application: Wet Polishing

**HTG-JCW**

Size: 4" 5" 7" 10"  
Application: Dry grinding

**HTG-PCD-CW2**

Size: 4" 5" 7"  
Application: Dry grinding

**HTG-DGW-CW**

Size: 10"  
Application: Dry grinding



**HTG-PCD-CW**

Size: 4" 5" 7" 10"  
Application: Dry grinding

**HTG-TCP-CW**

Size: 4" 5" 7" 10"  
Application: Dry grinding

**HTG-SPCW**

Size: 4" 5" 6" 7"  
Application: Dry grinding

**HTG-LSCP**

Size: 5" 6" 7"  
Application: Dry grinding



**HTG-SGW-CW**

Size: 4" 5" 7" 10"  
Application: Dry grinding

**HTG-TGP-CW**

Size: 180\*18\*8 250\*6\*10-16/20#  
250\*18\*10  
Application: Dry grinding



**HTG-CW1**



Size: 7" 10"  
Application: Dry grinding



	<p><b>MODEL</b> HTG-EC-N01</p> <p><b>NAME</b> Sodium Densifier</p> <p><b>PACKING</b> 60kg</p>		<p><b>MODEL</b> HTG-EC-C01</p> <p><b>NAME</b> compound densifier</p> <p><b>PACKING</b> 25kg</p>
---	---	---	---

	<p><b>MODEL</b> HTG-EC-L01</p> <p><b>NAME</b> Lithium Densifier</p> <p><b>PACKING</b> 25kg</p>		<p><b>MODEL</b> HTG-EC-S02</p> <p><b>NAME</b> Sealer</p> <p><b>PACKING</b> 20kg</p>
---	--	---	---

	<p><b>MODEL</b> HTG-EC-A01</p> <p><b>NAME</b> Sodium Densifier</p> <p><b>PACKING</b> 25kg</p> <p>Remark=Using with component B</p>		<p><b>MODEL</b> HTG-EC-FW01</p> <p><b>NAME</b> Antifouling Agent</p> <p><b>PACKING</b> 20kg</p>
--	--	--	---

	<p><b>MODEL</b> HTG-EC-B01</p> <p><b>NAME</b> Magnesium Densifier</p> <p><b>PACKING</b> 25kg</p> <p>Remark=Using with component A</p>		<p><b>MODEL</b> HTG-EC-1008</p> <p><b>NAME</b> Repair Adhesive</p> <p><b>PACKING</b> 20kg</p>
---	---	---	---

		
CONCRETE COLORING AGENT CD-01 Concrete Dyeing System	CONCRETE COLORING AGENT CD-02 Concrete Dyeing System	COLOR-FIXING AND HARDENING AGENT CD-03 Concrete Dyeing System

**CONCRETE DYEING SYSTEM**

1. Grind with Metal pads HTG-2Y 30# 60#
  2. Harden with concrete densifier: HTG-EC-N01
  3. Polishing with resin pads HTG-C310 50#-400#
  4. Dyeing the concrete with colors HTG-EC-CD01
  5. Polish with high speed polisher with buffing pads 400#
  6. Apply color hardner HTG-EC-CD03
  7. Polish with high speed polisher with buffing pads 800# 1500#
- Packing:1L/20L

**STONE CARING CHEMICAL**

			
XY-001 Stone maintenance(oily)	SC-006 Dirty clearance medicine of the stone	SC-009 Marble yellow spot and the rust clearances	MC-08 Crystallizing liquid
			
XY-106 High gloss Granite crystal compound	XY-105 High gloss marble crystal powder	XY-107 Marble crystal powder	

**Effect Show**





## MARBLE POLISHING PROCESS

Step 1	Finished goods protection		
Step 2	Dry polishing with resin pads HTG-XMD 50#		
Step 3	Spraying stone sealer XY-603		
Step 4	Cutting & Repairing joints		
Step 5	Wet polishing with resin pads HTG-JA 50# 150#		
Step 6	Spraying stone hardner Mc07		
Step 7	Wet polishing HTG-JA 300# (Wet polishing HTG-JN 500#)		
Step 8	Spraying stone sealer XY-603		
Step 9	Wet polishing HTG-JN 1000# - 3000#		
Step 10	Crystallization with XY-105		

## SHINNINGFLAT FLOOR SYSTEM

--FOR CONCRETE WITH HIGH DENSITY

Step 1	Check the surface condition		
Step 2	Grind with Metal pads HTG-2Y 30# 60#		
Step 3	Clean the Surface		
Step 4	Repair the Surface with HTG-EC-1008 and metal pads 120#		
Step 5	Polish with Resin pads HTG- C310 50# 100#		
Step 6	Harden the surface with densifier HTG-EC-L01		
Step 7	Polish with Resin Pads HTG-C310 200#, HTG-XZ 400#, 800#		
Step 8	Apply sealer HTG-EC-S01 to the surface		
Step 9	Buff with High Speed Polisher 700HP and Buffing Pads HTG-DIP-S0271500#		

--FOR SOFT CONCRETE

Step 1	Check the surface condition		
Step 2	Metal Pads HTG-2Y 30# 60# 120#		
Step 3	Hardening with densifier HTG-EC- A01		
Step 4	Resin pads HTG- C310 50#		
Step 5	Surface cleaning & repairing HTG-EC-1008		
Step 6	Resin pads HTG-C310 50# 100#		
Step 7	Hardening with densifier HTG-EC-B01		
Step 8	Resin Pads HTG-C310 200# 400# 800#		
Step 9	High Speed polisher HTG-HP27 with pads HTG-DIP-S027 1500#		


## Class S(super)--Tankstone Floor System Procedures

1. Level the concrete surface by grinding machine to obtain a clean substrate and to improve the adhesion for priming.
2. Clean the surface by vacuum and repair the cracks & hollows on the surface.
3. Priming to close perforation on the substrate.
4. Install the divider strips with construction glue.
5. Pave terrazzo mixture with epoxy resin and aggregates evenly on the surface.
6. Rough grinding with metal pads 60# ( dry )
7. Fine polishing with resin pads 50#, 100#, 200# ( dry )
8. Clean the surface by vacuum, and do grouting to close perforations on the surface.
9. Fine polishing with resin pads 400#, 800#, 1500#, 3000# ( wet )
10. Cleaning and sealing to get a better overall surface abrasion resistance.



## Class C (Classic)--Tankstone Floor System Procedures

1. Level the surface with grinding machine
2. Vacuum clean the surface to check the surface condition
3. Priming
4. Plaster fiberglass mesh (cloth)
5. Installing divider strips
6. Paving epoxy terrazzo mixture
7. Grinding repairing and polishing
8. Coating with polyurethane

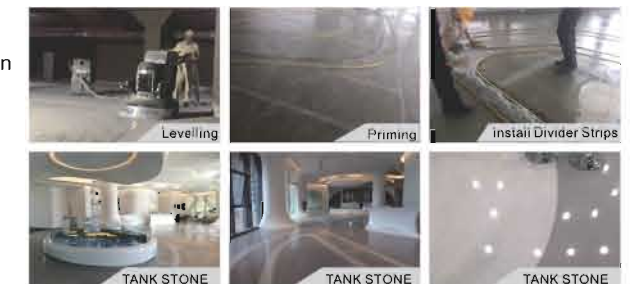






**TECHNICAL PARAMETER**  
TANK LASER SCREED MACHINE EL-25-2

Running Mode	wheeled driven
Wheel Base	880mm
Max Ground Clearance	285mm
Working Width	2500mm
Fastest Moving Speed	2.09km
Vibration Frequency	50HZ/70HZ
Working Efficiency	250-550m²/h
Packing Size	3210*2730*1160mm
Working Height	2100mm
Motor Type	Imported Honda GX200
Power	3.2KW
Gasoline Capacity	93# gasoline 17L
Start-up System	Started by hand

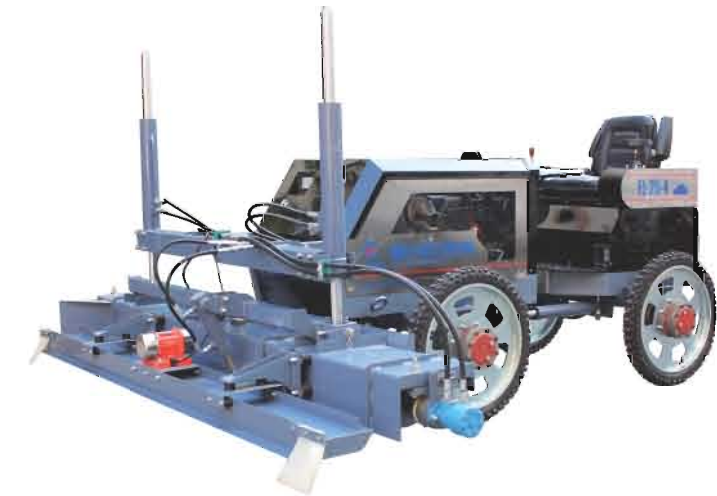


**TECHNICAL PARAMETER**  
TANK LASER SCREED MACHINE EL-25-4

Running mode	Four-wheeled Driven
Wheel base	1100mm
Axle base	1500mm
Working width	2500mm
Fastest moving speed	4.55km
Vibration frequency	50HZ
Packing size	3200*2900*1700mm
Working height	2100mm
Motor type	Kohler
Power	15.7KW
Air displacement	954CC
Oil capacity	3.0L
Diesel fuel capacity	10L
Start-up system	Electric starting
Net weight	780kg

**CONSTRUCTION PROJECT**

Xingyi will be full in participants in thousands of flooring construction.

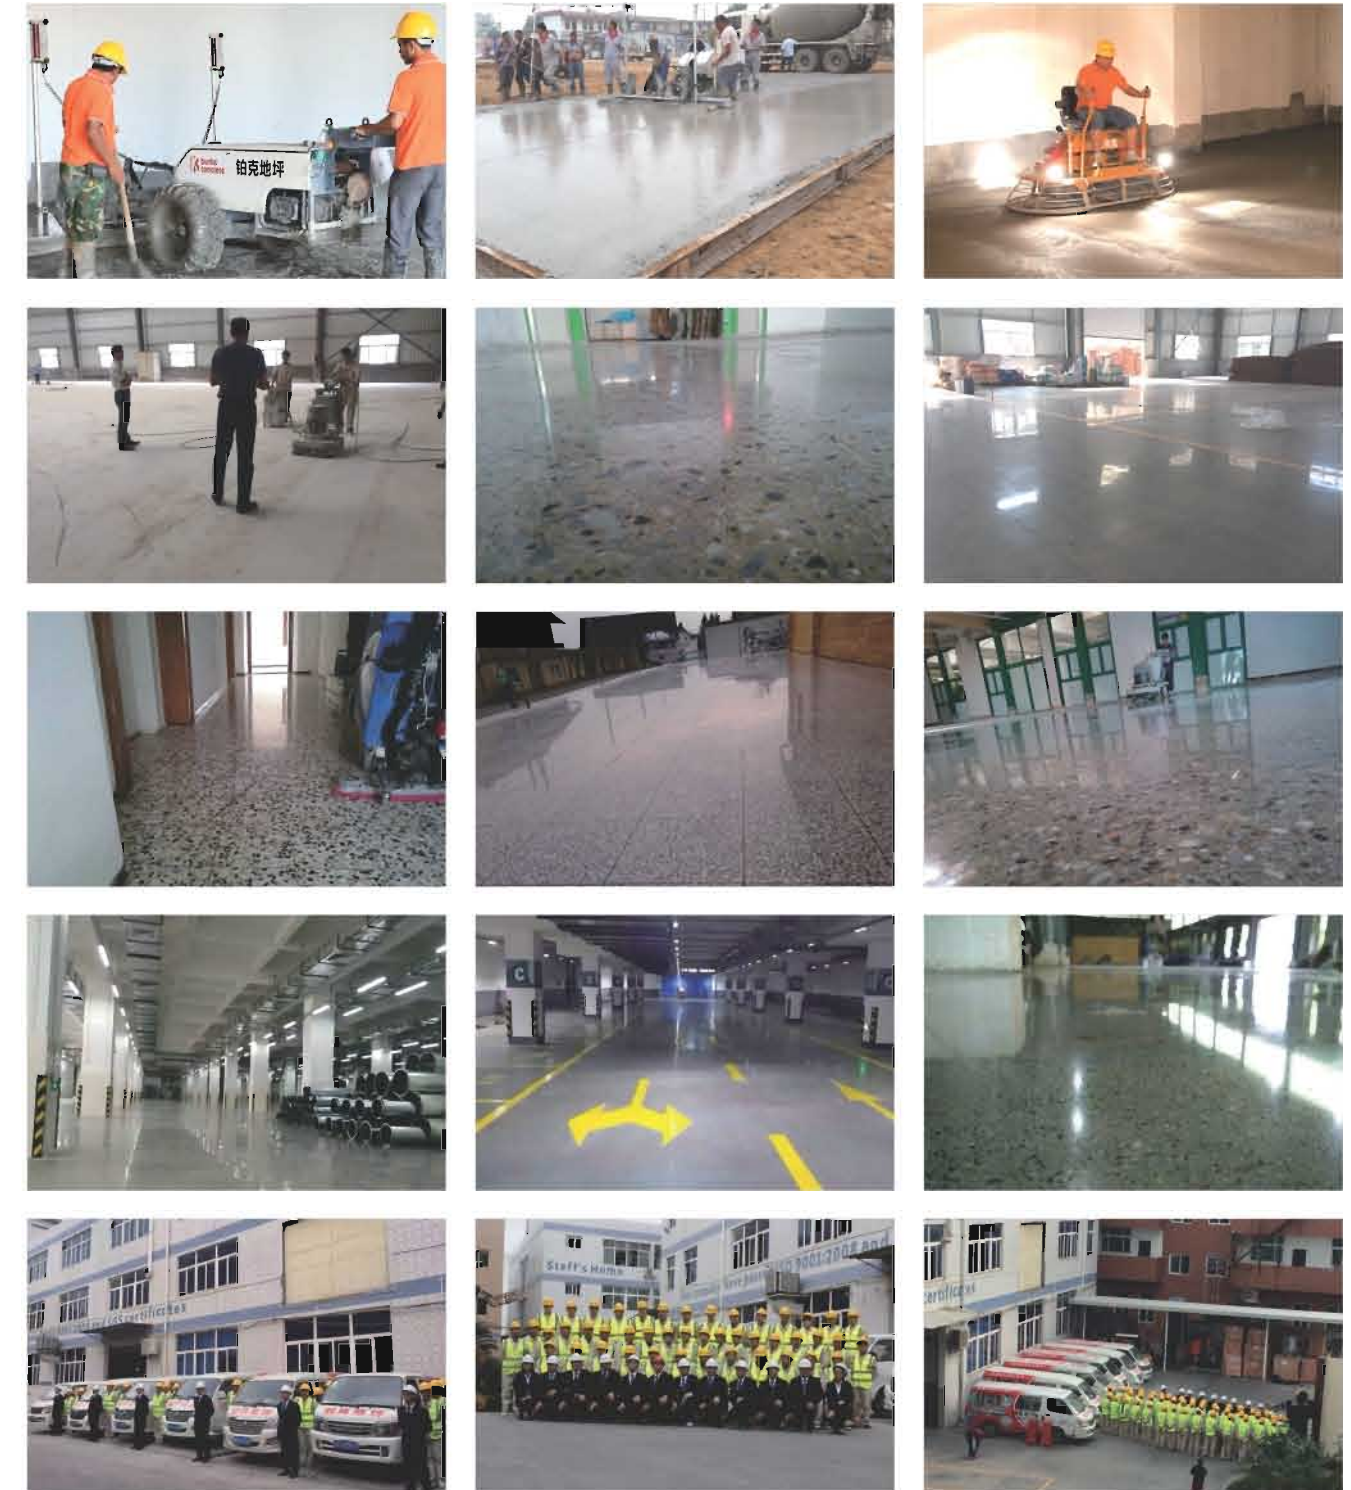



▼ TRANSPORT AND PACKING



Do quality testing before packing



Pack machine with Poly-wooden box



Reinforce the wooden case and label the mark



Send them to empty place for loading



Load the container



The thickness of crate

▼ SEMINAR


We will spare no effort to provide you with excellent quality products and after-sales service.





# XINGYI GLOBAL SALES NETWORK

Exported to 120 countries, Own 38 offices abroad.

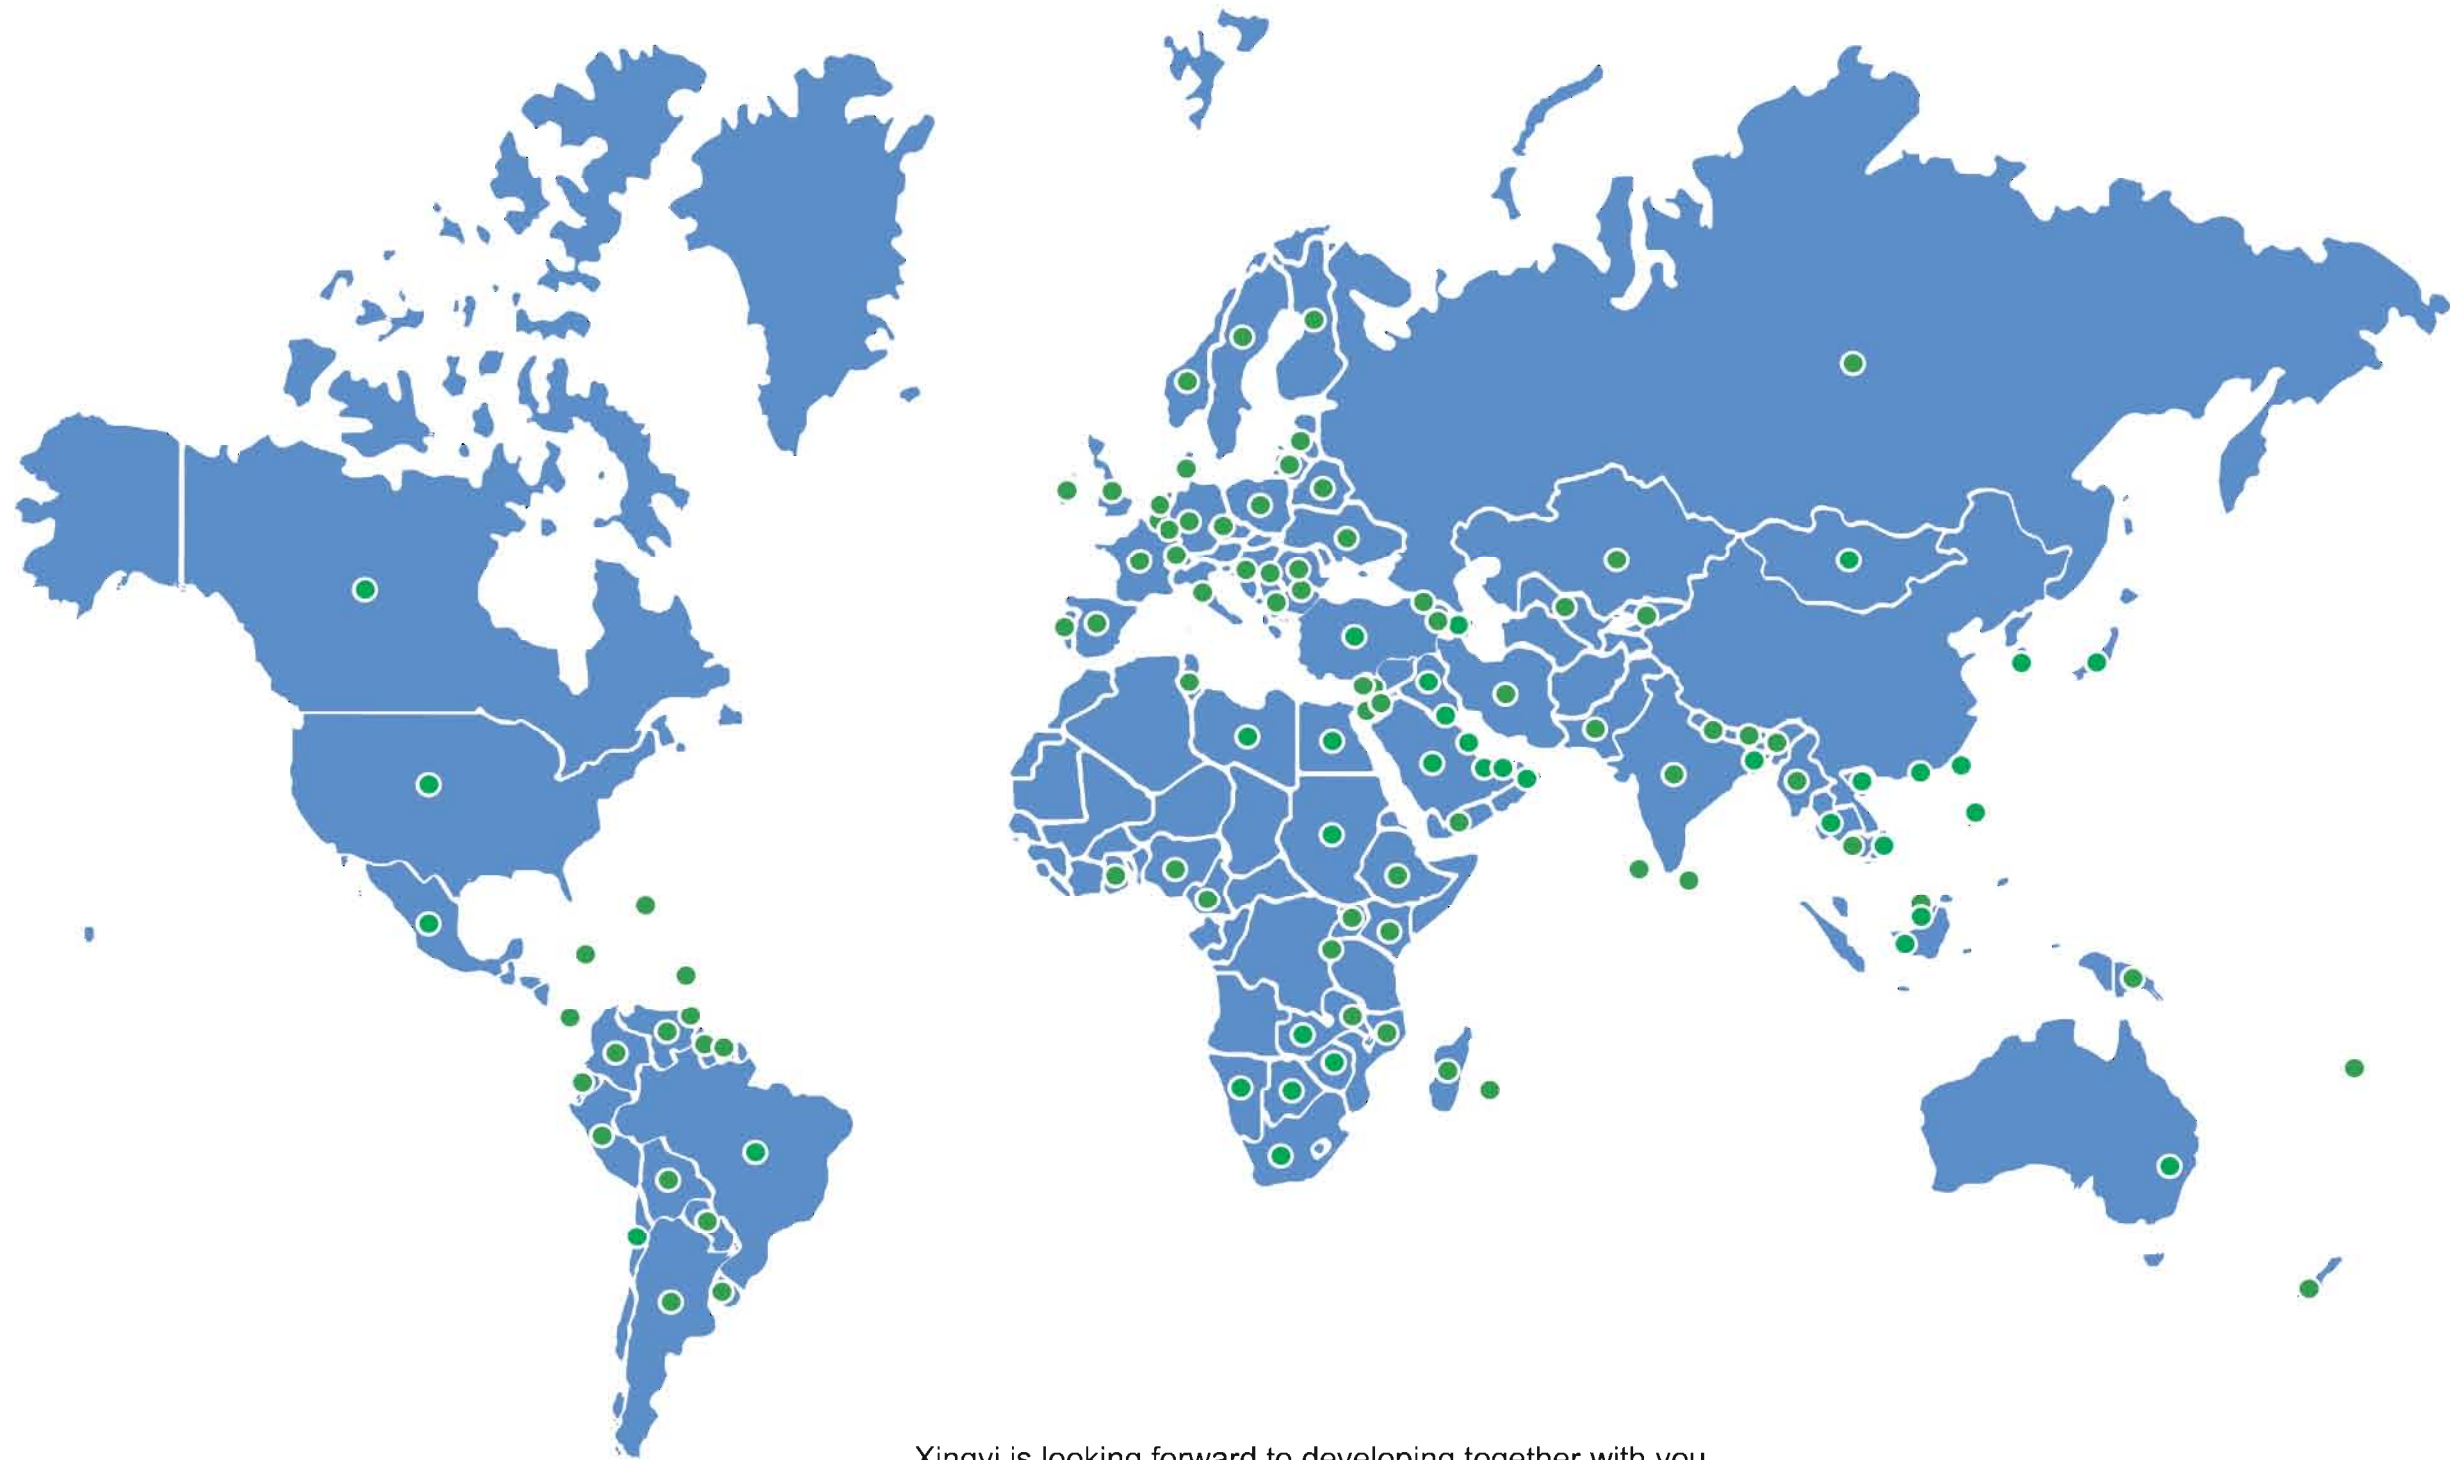

Xingyi is looking forward to developing together with you